

# A Study of 'Energy Efficient Routing Protocols for Zigbee Wireless Sensor Network

Smrati Sahu<sup>1\*</sup> Dr. Anand Gupta<sup>2</sup>

<sup>1</sup> Research Scholar, Swami Vivekananda University, Sagar, Madhya Pradesh

<sup>2</sup> Associate Professor, Department of Computer Science, Swami Vivekananda University, Sagar, Madhya Pradesh

**Abstract –** *Wireless Sensor Network (WSN) is conveyed in numerous fields, for example, social insurance, condition control, astute, structures, and so forth. It comprises of an arrangement of little and low-control gadgets called sensor nodes which cooperate with their condition to detect physical marvels. In the wake of being sent on the territory to screen, these nodes are equipped for neighborhood handling, correspondence and self-association. Truth be told, they gather ecological data and cooperate to transmit the information to at least one accumulation focuses (sinks) in an independent way. The Zigbee standard intends to permit the interconnection of wireless gadgets with low self-sufficiency (battery fueled) and does not require high piece rate, this standard speaks to a perfect contender for wireless sensor networks. WSNs must work at any rate for a given mission time, and all the while supplanting nodes' batteries is regularly incomprehensible. Thus, the lifetime forecast for WSNs turns into a noteworthy concern. For a dependable lifetime forecast, a total energy consumption investigation is fundamental. In like manner, it ought to think about the most essential wellsprings of energy consumption, in particular transmitting and accepting information bundles, tuning in to the channel, transmitting, getting control parcels and getting parcels from neighbors.*

**Keywords:** *Wireless Sensor Network, Energy Efficient, Routing Protocols, Zigbee.*

-----X-----

## INTRODUCTION

ZigBee is another innovation currently being sent for wireless sensor networks. A sensor network is a foundation contained detecting, figuring and correspondences components that enables the director to instrument, watch and respond to occasions and marvels in a predetermined domain. Normal applications incorporate, yet are not restricted to, information accumulation, checking, reconnaissance and therapeutic telemetry. The chairman normally is a common, government, business or mechanical substance.

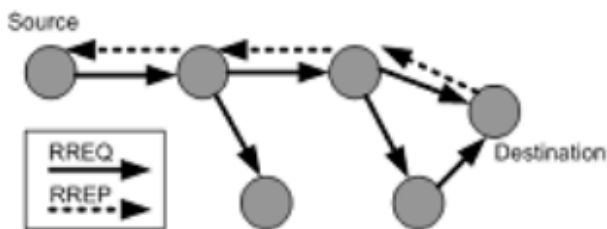


Fig 1.1 a Simple Routing Chart

The noteworthy innovative work endeavors, inventive fields of electronics, for example, installed technology, VLSI outline and technology, wireless communication, estimation and control, car electronics, mechatronics, sensor technologies and so on are developing. In light of wide application potential these areas are winding up increasingly omnipresent. Amid early days, wireless communication is a standout amongst the most vital fields of electronics, which is advancing in the portable communication divisions, long range communication and short range communication too. The wireless communication rises with creative field called Wireless Sensor Network (WSN). This field of Wireless Sensor Network displays wide spectrum of applications, covering the regions, for example, accuracy farming, environmental observing and control military and obstruction, remedial et cetera. Hence, because of its national and in addition universal pertinence, numerous specialists are embraced explore work in the regions of Wireless Sensor Network (WSN). This Innovation is included with great adaptability in configuration, better versatility, unwavering quality, compactness, transmission range, low power, minimal effort and simple to arrangement and so on .Especially, to

develop nations like India, where horticulture is the foundation of Indian economy, the organization of unmistakable highlighted WSN to screen environmental parameters of poly-house is the novel field of investigation. Thusly, look into work of improvement of Wireless Sensor Network for checking of environmental parameters of poly-house environment is attempted. The insights with respect to WSN are explored and WSN is set up for innovative poly-house applications.

Wireless Sensor Network (WSN) is a spread system built with a couple of little modules called Wireless Sensor Node (WS-Node). Each WS-Node is outfitted with at least one sensing devices, for example, gas sensors, electrical conductivity (EC) sensor, infrared (IR), seismic or attractive sensors, industrial sensors, environmental sensors and so on, the handling unit, memory unit and RF module. The WS-Node discusses wirelessly with other nearby nodes inside the bunch characterized by the radio communication range. Wireless Sensor Network is a powerful device that empowers the clients to nearly screen, comprehend and control wanted procedures. The Wireless Sensor Network (WSN) gives a variety of WS-Node to ongoing and remote connection with the physical world. Savvy wireless networked sensors can gather and scatter a tremendous measure of environmental data. Every sensor faculties environmental parameters, in the wake of handling a similar it communicate the data to an inaccessible Base station through which one can get to the data for additionally utilize. The design of Wireless Sensor Network is portrayed in 1.5. Every sensor hub powers with partitioned battery and it devours low power. Along these lines, it beats the disadvantage of high power prerequisite of wired sensor network. Wireless Sensor Network innovation uses particular convention guidelines for short range wireless communication like Bluetooth Zigbee and Wi-Fi of all wireless communication standards, the Zigbee technology is most dependable and reasonable for indoor and additionally open air sensor network.

It gives transmission speed normally 250 kbps over a range of 10-100 m. Zigbee can be arranged in star, work or distributed topologies. Zigbee devours impressively less power than Wi-Fi and Bluetooth technology. Also, Zigbee technology is most appropriate to guarantee the wireless communication for Precision Agriculture. To put it plainly, the exactness and unwavering quality of Wireless Sensor Network (WSN) relies upon the shrewdness of wireless Sensor Node (WS-Node). Keeping in mind the end goal to accomplish huge change in the execution of Wireless Sensor Network, the Wireless Sensor Node ought to have great exactness. Especially, an inserted framework in light of microcontroller is discovered most appropriate for this application. Presently, microcontrollers of promising highlights are accessible in the market, utilizing which WS-Node can be intended for devoted applications. Stressing the promising highlights of Wireless Sensor Network and its reasonableness for acknowledgment


of Precision Agriculture, it is proposed to attempt the examination work of advancement of Wireless Sensor Network (WSN), in light of Zigbee technology, to screen different environmental parameters of poly-house, for example, mugginess, temperature and light force and so on.

## WIRELESS SENSOR NETWORK (WSN):

Wireless Sensor Network (WSN) is a champion among the most imperative advancements, which is raising a direct result of driving forward effort of the analysts for improvements in the field of wireless communication. It is great case of foundation of dispersed network. Ordinarily, the WSN is the appropriate for data accumulation and observing. Nonetheless, it display wide spectrum of applications in different zones.

Wireless Sensor Network (WSN) is the circulated network of vast number of wirelessly associated autonomous devices, called Wireless Sensor Nodes (WS-Node), which cooperatively gathers the data about physical world and disperses the same towards the observing stations called Base Station (BS) for the deterministic investigation and introduction. The WSN is a foundation consists of sensing, figuring and communication components that gives, to the administrator, the capacity to instrument, watch and reset to the occasion and marvels in the specific environment and to guarantee edit administration in spatial and worldly area. Fundamentally, there are following four parts of the Wireless Sensor Network (WSN).

General design of Wireless Sensor Network is delineated in fig 2

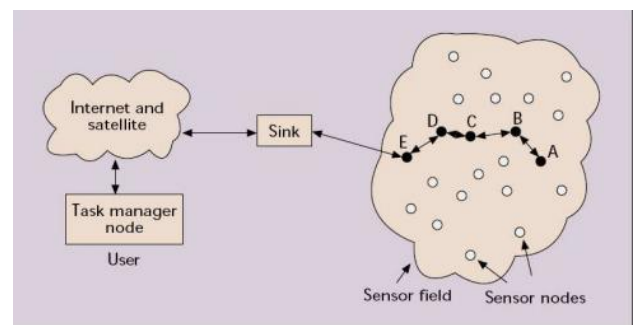

**Fig 2 General Architecture of Wireless Sensor Network**

1. An get together of disseminated WSNodes
2. An interconnecting wireless network
3. A focal monitoring focus called base station
4. An arrangement of processing devices required for data calculation, co-connection, occasion, drifting, status questioning and incitations.

It is networking capacity that on a very basic level separates a sensor network from gathering of sensors, by empowering participation, coordination and joint effort among sensor resources. Reaping progresses in the previous decade in microelectronics, comes about into huge change in sensing, simple and computerized flag preparing, wireless communication and networking and so forth which uncovers noteworthy effect on our lives.

Wireless Sensor Networks vary from general data networks, on account of the way that the WSN are application particular, planned and sent for unique purposes as it were. Because of their few well known applications, effective outline and usage of Wireless Sensor Network have turned into a region of momentum look into. Sensing, handling and communication are key components, whose mix in one little gadget offers ascend to countless sensing applications. The WS-Nodes in a WSN work with little and restricted battery power and for the most part non-renewable resource. Since communication among nodes uses a substantial part of the energy .it is imperative to outline the network with less communication among the nodes to appraise the required parameter vector.

### **DESIGN ISSUES AND DIFFICULTIES**

Wireless Sensor Networks represent certain plan challenges because of the accompanying reasons:

Sensor nodes (WS-Nodes) are arbitrarily sent and thus don't fit into any consistent topology. Once sent, they normally don't require any human intercession. Consequently, the setup and support of the network ought to be completely self-sufficient. Sensor networks are framework less. Consequently, all routing and upkeep calculations should be appropriated. A critical bottleneck in the task of sensor nodes is the accessible energy. Sensors as a rule depend just on their battery for power, which as a rule can't be energized or supplanted. Subsequently, the accessible energy at the nodes ought to be considered as a noteworthy imperative while planning protocols. For example, it is attractive to give the client an alternative to trade off network life time for adaptation to internal failure or exactness of results.

Hardware plan for sensor nodes ought to likewise consider energy effectiveness as an essential necessity. The microcontroller, operating system, and application software ought to be intended to moderate power. Sensor nodes ought to have the capacity to synchronize with each other in a totally dispersed way, so TDMA timetables can be forced and requesting of distinguished events can be performed without vulnerability. A sensor network ought to likewise be equipped for adapting to change connectivity because of the disappointment of nodes, or new hub powering up. The routing protocols ought to have the capacity to

powerfully incorporate or maintain a strategic distance from inclusion and recuperating sensor nodes in their ways. Constant communication over sensor networks must be bolstered through arrangement of assurances on most extreme postponement, minimum bandwidth, or different QoS parameters. Arrangement must be made for secure communication over sensor networks, particularly for military applications which convey touchy data.

### **DESCRIPTION OF WIRELESS SENSOR NETWORKS:**

The possibility of sensor network was displayed in the midst of time of Cold War. An arrangement of acoustic sensors on the ocean base, for sound surveillance was sent by USA to distinguish and track Soviet submarines. In the midst of same time, joined States developed the network of air obstruction radars to monitor its space, which as of now is in like manner used for sedate boycott. Exploration on sensor networks are begun around 1980 .Where ARPANET (Predecessor of the Internet) approach for communication was stretched out to sensor networks. DSNs were acknowledged to have various spatially passed on negligible exertion sensing nodes that cooperated with each other anyway worked self-overseeing, with information being coordinated to the nodes, which is best prepared to use the information. Around at that point, this was extremely a forceful program. There were no PCs and workstations; taking care of was essentially performed on minicomputers and the Ethernet was basically getting the opportunity to be popular. Advancement parts for a DSN were seen in a Distributed Sensor Nets workshop in 2015

The DSN incorporates sensors (acoustic), communication and overseeing modules, and scattered programming also. Scientists at Carnegie Mellon University (CMU) even built up a communication-sorted out working structure called Accent which permitted flexible, direct gets to scattered resources required for a charge tolerant DSN. An expressive utilization of DSN was a helicopter following structure, utilizing a scattered bunch of acoustic speakers by procedures for hail contemplations and organizing frameworks, made at the Massachusetts Institute of Technology (MIT). Disregarding the way that early stars on sensor networks had as a basic concern the vision of a DSN, the development was not correctly arranged. All the more particularly, the sensors were to some degree gigantic and of shocking expense with obliged the measure of potential applications. Further, the most dependable DSNs were not ardently connected with wireless network. Constant advances in getting ready, communication and littler scale electromechanical development has caused a tremendous move in WSN get some information about and passed on it closer to accomplishing the

essential vision. The new surge of research in WSNs began in around 1998 and has been pulling in more idea and all inclusive alliance. In the new surge of sensor network, the examination on detecting, networking systems and networked information managing, sensible for essentially extreme extraordinarily delegated conditions and resource obliged sensor nodes have been secured.

## NETWORK PROTOCOL FOR WIRELESS SENSOR NETWORK:

The WSN, following IEEE 802.15.4 standards, understands the wireless communication and gather site particular data appropriate for the management. The WSNs of devoted applications convey Zigbee technology for wireless communication. This Zigbee underpins standard topologies of communication, for example, Star, Ring and Mesh. Notwithstanding, to set up the WSN, routing of the WS-Nodes is testing work. The WS-Nodes could be steered in different approaches to enhance the parameters of WSN. The courses by which the WS-Nodes steered into the network are called as Routing Protocols for WSN. As indicated by network structure, these protocols can be delegated level, progressive, and area based protocols. Additionally, these protocols can be grouped into multipath-based, inquiry based, arrangement based Quality of Service (QoS)- based or lucid based relying upon the protocol activity. Also, these protocols can be ordered into three classes, to be specific, reactive, proactive, and crossover protocols relying upon course disclosure. In level based routing, all nodes are doled out with similar parts or functionalities. In various leveled based routing, nodes will play diverse functionalities. Going for routing procedures, clustering the nodes with indistinguishable parts portrays cluster heads. The cluster head capacity to gather the data and end devices are conveyed to detect the physical data. In area based routing; sensor nodes' positions are abused to course the data to particular areas other than the entire network. In addition, the WSN acknowledges following protocols. Deployment of protocols relies on the idea of application.

## FEATURES OF ZIGBEE

- a) 2.4 GHz upper frequency band is utilized. The lower band frequencies are 915 MHz in America and 868 MHz in Europe. Free bands are likewise accessible as a couple of 4-2.4835 GHz, 868-870 megahertz and 902-928 megahertz. The number of channels relegated for each band is considered as sixteen, one and ten separately.
- b) Low power use.
- c) Discovery and blending techniques matches in the application of IEEE 802.15.4

- d) ZigBee uses distinctive sorts of star topology and it is made with between personal area network (PAN) communication with a Centralized undertaking of ZigBee nodes under coordinator.
- e) The IEEE 802.15.4 utilizes different transmission strategies like broadcast, Security key age instrument with AES-128.
- f) Reduced upkeep: The ZigBee network has its own particular function of self-configuring and self-mending capacities. These properties help Mesh networks to naturally recognize and investigate issues that may happen in the associated nodes.

## DEVICES AND TOPOLOGIES (ZIGBEE)

The standard embraces two distinct sorts of device that are executed in a network to be specific; the FFD (Full-Function Devices) and the RFD (Reduced-Function Devices). Figure 3.1 demonstrates the distinctive sorts of ZigBee topology.

**ZigBee consistent device composes:** There are basically three distinct classifications of nodes in a ZigBee topology. They are named Coordinator, Router and End devices.

**Coordinator (ZC):** This is the single fundamental base of the network tree and as an extension it associates with different networks. This node is exclusively in charge of starting and in addition choosing the network parameters like radio frequency channel, one of a kind network identifier and setting other operational parameters. This node can likewise store all the data about network and its security levels.

**Router (ZR):** Router function as intermediate nodes amongst coordinator and end device and it is handing-off data from different devices. Router can speak with existing network and can ready to interface with different devices. It is retransmitting the data to the network. Any of the networks can be reached out with the usage of ZigBee IEEE 802.15.4 standard routers.

**End Devices (ZED):** Continuously End Device can be outlined with low-power and battery-powered devices. They can get data from sensors and switches. End devices can speak with either the coordinator or a router and can't retransmit data from any of the devices. Because of this less work routine of end device, they can be planned with low power utilization and it is temperate one.

These end devices require not be dynamic for the entire time while the coordinator and router will work its whole day and age. Because of this reason, the



ZigBee end node can stay snoozing just up to the time its work required by the specific network.

## FORMING A SECURITY ARCHITECTURE FOR ZIGBEE:

A 128-piece key can be connected either to both the MAC sub layer and ZigBee layers or to a connection, increased through agreement, pre-establishment or transport. Anchored network will discover exceptional device which different devices trust for the security keys dissemination: the trust focus. Common applications without unique security needs will utilize a network key gave by the trust focus through at first shaky channel to convey.

The trust focus keeps up the network key and point-to-point security is given. Devices can acknowledge messages starting from a key gave by the trust focus, with the exception of the specific introductory master key. The architecture for security is conveyed in the network layers as follows:

- ▶ The MAC sub layer can be fit for solid single-jump communications. The security level is dictated by the upper layers.
- ▶ The network layer manages taking care of received data, routing and broadcasting demands. The satisfactory link key will be utilized by active casings as per the routing, in the event that it might be accessible; or to shield the payload from outer devices, the network key will be used.
- ▶ The application layer offers transport services and key establishment to the two applications and ZDO. Master, link and network keys are three sorts of Keys accessible.

## CONCLUSION

ZigBee network layer conventions, a great deal of examine establishments and modern organizations have built up their sensor stages based on ZigBee/IEEE 802.15.4 arrangements. ZigBee and IEEE 802.15.4 are intended for lightweight sensor phases. We have too tended to a few applications, for example, restorative care and fire emergency applications and some prototyping systems. Wireless Sensor Network is the progressive field assuming critical part in the different divisions of electronics. Its promising highlights lead the field to wind up pervasive over the world. It delineates an emotional intersection of electronic and computer advances, which comes about into wide range of applications in the different divisions, for example, industries, medical, agricultural, military, automotive electronics, defense, surveillance, auxiliary security, home and additionally office atomization etc.

## REFERENCES

- [1] AlfiyaShaikh (2012). "Hybrid Wireless Communication System Using ZigBee And Wi-Fi Technology In The Coalmine Tunnels", International Journal of Emerging Technologies in Computational and Applied Sciences, vol. 1, no. 3, pp. 21-25
- [2] Boyina, S., Rao, Deepa, K., Abarna, I., Arthika, S., Hemavathi, G. & Mohanapriya, D. (2012). "Controller Area Network For Monitoring And Controlling The Environmental Parameters Using Zigbee Communication", International Journal of Advanced Engineering Technology, vol. 3, no. 2, pp. 34-36.
- [3] Conzon, D., Brizzi, P., Kasinathan, C., Pastrone, F., Pramudianto & Cultrona, P. (2015). "Industrial application development exploiting IoT vision and model driven programming", Proceedings of 18th Conference Innovation in Services, Networks and Clouds, Feb 02, 2015, Paris, France
- [4] Chayan Sarkar, Akshay Uttama Nambi, S.N., Venkatesha Prasad, R., Abdur Rahim, Ricardo Neisse & Gianmarco Baldini (2014). "DIAT: A Scalable Distributed Architecture for IoT", IEEE Internet of Things Journal, vol. 2, no. 3, pp. 230-239
- [5] Cherkaoui, A., Bossuet, L., Seitz, L., Selander, G. & Borgaonkar, R. (2014). "New paradigms for access control in constrained environments", Proceedings of Reconfigurable and Communication-Centric Systems-on-Chip, May 26-28, 2014: Montpellier.
- [6] Chen Jun & Chen Chi (2014). "Design of Complex Event-Processing IDS in Internet of Things", Proceedings of Sixth International Conference on Measuring Technology and Mechatronics Automation, 10-11 Jan. 2014: Zhangjiajie
- [7] Debasmit Banerjee, Bo Dong, Mahmoud Taghizadeh & Subir Biswas (2014). "Privacy Preserving Channel Access for Internet of Things", IEEE Internet Of Things Journal, vol. 1, no. 5, pp. 430-445
- [8] Kelly, Suryadevara, N.K. & Mukhopadhyay, S.C. (2013). "Towards the Implementation of IoT for Environmental Condition Monitoring in Home", IEEE Sensors Journal, vol. 13, no. 10, pp. 3846-3853

- [9] Matharu, G.S., Upadhyay, P. & Chaudhary Matharu, L. (2014). "The Internet of Things: Challenges & security issues", Proceedings of the International Conference in Emerging Technologies, 5-6 April 2014, Noida, India
- [10] Mrunalini P. Moon (2014). "Approach of Data Broadcasting By Using Zigbee Network", International Journal of Advance Research in Computer Science and Management Studies, vol. 2, no. 11, pp. 102-109
- [11] Mohammed, Chung Horng Lung, Adrian Ocneanu, Abhinav Thakral, Colin Jones & Andy Adler (2014). "Internet of Things: Remote Patient Monitoring Using Web Services and Cloud Computing", Proceedings of Internet of Things (iThings), IEEE International Conference on, and Green Computing and Communications, IEEE and Cyber, Physical and Social Computing, 1-3 Sept. 2014, Taipei

---

#### Corresponding Author

**Smrati Sahu\***

Research Scholar, Swami Vivekananda University,  
Sagar, Madhya Pradesh