



Zinc Oxidethin film as H₂S Gas Sensor

Vishwas Pratap Banga^{1*}, Manmohan Mishra², Mahendra Kumar³

1. Department of Physics, University of Lucknow, Lucknow, India
vishwaspratapbanga@gmail.com,

2. Department of Physics, University of Lucknow, Lucknow, India,

3. Department of Physics, University of Lucknow, Lucknow, India

Abstract: The zinc oxide thin film has been produced and examined as a sensing element for H₂S gas detection. Dip coating was used to create the zinc oxide thin films. By varying the concentration of test gases, the gas sensing characteristics of zinc oxide thin films for H₂S, LPG, NH₃ gases were investigated. The produced zinc oxide thin films are a potential material for high-sensitivity semiconductor gas sensors for dangerous gases such as H₂S.

Keywords: zinc oxide, thin film, H₂S, gas sensor

----- X -----

INTRODUCTION

H₂S is a poisonous & combustible gas generated in sewage treatment plants, coal mines, & the oil & natural gas sectors. It is widely utilised in the chemical industry, research facilities, & as a process gas in manufacturing of heavy water. At these low levels, it is necessary to detect H₂S. Low amounts of this gas may be detected by spectral and fluorescence analyses [2, 3], but these sensors are expensive and huge. Semiconductor gas sensors have shown to be a low-cost and practical alternative for monitoring gas species, as have metal oxide sensors based on SnO₂, ZnO.

Semiconductor gas sensors have shown to be a low-cost & simple solution for monitoring gas species, & sensors based on metal oxides such as SnO₂, ZnO have been reported to detect H₂S gas in the ppm range [4,5]. Low-concentration sensors have recently been identified [6,7].

With a large excitation binding energy (60 meV) and a wide band gap (3.4 eV), zinc oxide (ZnO) has received a lot of attention for its electronic and photonic applications like ultraviolet (UV)/blue light-emitting devices, solar cells, piezoelectric devices, acousto-optical devices, and chemical sensors [8] and [9,10]. The development of gas sensors to detect volatile and harmful gases is now crucial due to concerns about environmental pollution and the safety demands of business and daily life. Because of its great electrochemical stability, non-toxicity, doping adaptability, and inexpensive cost, ZnO has been regarded a viable material for gas sensors. Because the detecting properties of a sensor are heavily dependent on form & dimensionality of the sensing material, several ZnO nanostructures have been manufactured & researched during last decade.


EXPERIMENTAL METHODS

Dip coating was used to deposit films on glass substrates (microscope slides). Before deposition, the substrates were washed using newly made chromic acid, followed by a detergent solution & distilled water.

The precursor solution was produced in distilled water with a 0.1M concentration of high quality zinc acetate ($\text{Zn}(\text{CH}_3\text{COO})_2$) and swirled continuously for 1 hour at room temperature. This solution was placed in a beaker, and the pH was kept at 8. Another beaker is filled with hot water at 75°C . The cleaned glass plate was initially submerged for a few seconds in Zinc acetate solution before being immersed in hot water solution. This procedure is performed 50 times.


RESULTS & DISCUSSION

The XRD pattern of sample shows that films are polycrystalline in nature showing the lattice planes (100), (101) and (002) planes corresponds to that of ZnO.

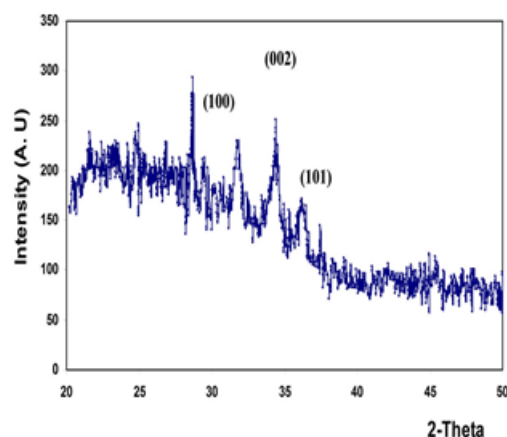


SCANNING ELECTRON MICROSCOPY

The SEM micrograph of ZnO is shown in figure above which shows flake like structure all over the plane surface.

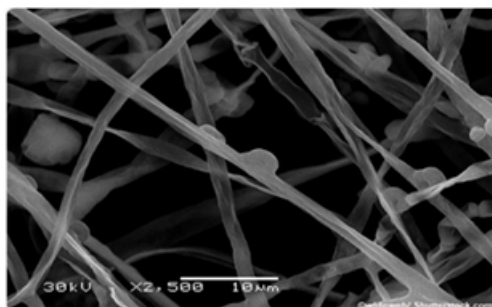

GAS-SENSING STUDIES

The sensing properties of pure ZnO have been observed at room temperature (28°C). It is found that the sensitivity variations with: (1) increase in H_2S gas concentration for pure ZnO nano composites sensitivity gets increased.

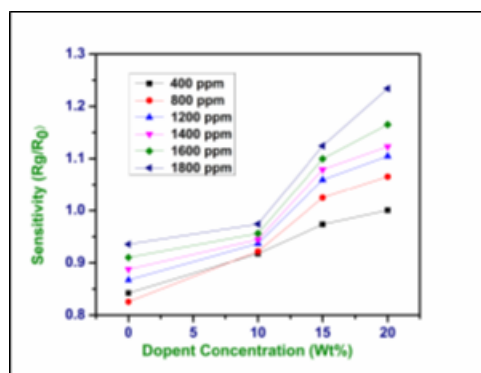

CONCLUSION

The structural, morphological, optical, & gas sensing characteristics of ZnO nanorods were investigated in this work. The ZnO nanorods are created using a simple dip coating process. The nanorods' structural analysis revealed a hexagonal wurtzite structure. For 30k resolution, flower-like bunches are formed, but for 60k resolution, the crystal structure is rod-like in FESEM findings. The diameter of rod spans from 20nm to 93nm, with a maximum length of 961 nm discovered. The band-gap of ZnO synthesised with zinc nitrate as a precursor and sodium hydroxide as a reducing agent was calculated using an absorption spectra. It was discovered to be 3.37 eV. This value is exactly the same as the advertised value. The thick films were made by screen printing & ranged in thickness from 25m to 35m. The nanocrystalline ZnO-based sensor had the best response to H₂S gas.

ACKNOWLEDGEMENT

The authors gratefully acknowledge UGC fellowship for financial support, as well as the lab and library facilities provided by the National Physical Laboratory (NPL), New Delhi, and the Nanomaterials & Environmental Sensors Research Laboratory, Department of Physics at the University of Lucknow, Lucknow, for providing laboratory facilities.

References

1. R. Ionescu, A. Hoel, C.G. Granqvist, E. Llobet, P. Heszler, Low-level detection of ethanol and H₂S with temperature-modulated WO₃ nanoparticle gas sensors, *Sens. Actuators B* 104 (2005) 132–139.
2. M. Kaur, S. Bhattacharya, M. Roy, S.K. Deshpande, P. Sharma, S.K. Gupta, J.V. Yakhmi, Growth of nanostructures of Zn/ZnO by thermal evaporation and their application for room temperature sensing of H₂S gas, *Appl. Phys. A* 87 (2007) 91–96.
3. Abideen, Z., Kim, J.-H., Mirzaei, A., Kim, W. H., and Kim, S. S. (2018). Sensing behavior to ppm-level gases and synergistic sensing mechanism in metal-functionalized rGO-loaded ZnO nanofibers. *Sens. Actuat. B Chem.* 255, 1884–1896.
4. Yue, Y., and Yu, H. (2019). Study on gas sensitivity of new SnO₂ nanosheets. *Enterprise Sci. Technol. Dev.* 6, 90–91. doi: 10.3969/j.issn.1674-0688.2019.06.040.
5. M. Kaur, S. Bhattacharya, M. Roy, S.K. Deshpande, P. Sharma, S.K. Gupta and J.V. Yakhmi, Growth

of nanostructures of Zn/ZnO by thermal evaporation and their application for room temperature sensing of H₂S gas, *Appl. Phys. A* 87 (2007) 91–96.

6. Choi, M. S., Bang, J. H., Mirzaei, A., Na, H. G., Jin C., Oum W., et al. (2019). Exploration of the use of p-TeO₂-branch/n-SnO₂ core nanowires nanocomposites for gas sensing. *Appl. Surf. Sci.* 484, 1102–1110. doi: 10.1016/j.apsusc.2019.04.122.
7. Abideen, Z., Kim, J.-H., Mirzaei, A., Kim, W. H., and Kim, S. S. (2018). Sensing behavior to ppm-level gases and synergistic sensing mechanism in metal-functionalized rGO-loaded ZnO nanofibers. *Sens. Actuat. B Chem.* 255, 1884–1896. doi: 10.1016/j.snb.2017.08.210.
8. Ahmad, R., Majhi, S. M., Zhang, X., Swager, T. M., and Salama, K. N. (2019). Recent progress and perspectives of gas sensors based on vertically oriented ZnO nanomaterials. *Adv. Colloid Interface Sci.* 270, 1–27. doi: 10.1016/j.cis.2019.05.006.
9. Drobek, M., Kim, J. H., Bechelany, M., Vallicari, C., Julbe, A., and Kim, S. S. (2016). MOF-based membrane encapsulated ZnO nanowires for enhanced gas sensor selectivity. *ACS Appl. Mater. Interfaces* 8, 8323–8328. doi: 10.1021/acsami.5b12062.
10. Andre, R. S., Mercante, L. A., Facure, M. H. M., Mattoso, L. H. C., and Correa, D. S. (2019). Enhanced and selective ammonia detection using In₂O₃ /reduced graphene oxide hybrid nanofibers. *Appl. Surf. Sci.* 473, 133–140. doi: 10.1016/j.apsusc.2018.12.10.