



A Study of Efficient & Optimized Wave Network in Optical Fiber

Vaibhav Jain ¹, Dr. Girish Padhan ²

1. Research Scholar, Shri Krishna University, Chhatarpur M.P., India ,
2. Associate Professor, Shri Krishna University, Chhatarpur M.P., India

Abstract: Due to its high dielectric strength and large bandwidth (BW), fiber optic communication has found primary application in the design and construction of automated distribution systems. This paper presents a comprehensive analysis of optical fiber, dissecting its fundamentals, applications, and root causes in the development and deployment of fiber optic cabling. This study details the prerequisites and draws comparisons to optical fiber methods. Wireless communication and broadcasting technologies have enabled the continuous global expansion of multinational corporations. In terms of technological advancement, fiber-optic communication stands out as the most recent and cutting-edge option available. Since then, the growing population has steadily increased the demand for BW in communications. In order to motivate scientists working in communication to seek out new options, ever-larger BWs were required. Researchers in the field of communication were scouring the globe for a medium of data transmission that was both wireless and minimal in loss, hoping to recover as much information as quickly as possible at the expense of quality. This unceasing exploration of potential transmission mediums ultimately resulted in the advent of optical fiber. First, let's take a short glance back at what's been said. Since the signals on the several cables don't mix, there's no chance for any background noise to be gathered. Electrical interference does not affect fibers. Due to the electric nature of unarmored fiber cables, they can effectively shield high-voltage communication devices, such as those found in power plants or in areas where metal communications are vulnerable to lightning. It can also be employed in environments where there is a risk of explosive gases without the need for any kind of ignition source. The tap-resistance of these concentrated dual-core fibers is similar to that of electrical connections, although it involves a more involved process (in this case, fiber tapping). Fibers are commonly used for short-distance connections between devices. Since most modern HDTVs provide an optical digital audio input. Utilizing the TOSLINK standard, audio can be sent via optical fiber.

Keywords: Wave Network, Optical Fiber, high dielectric strength, Wireless communication, high-voltage communication devices

----- X -----

INTRODUCTION

Optical fiber is a specific kind of cable that consists of many fibers. Protective plastic sheaths are wrapped around each fiber individually. The number of organizations using OF has exploded recently. OFs are used to send information as a beam of light between the two ends of a fiber. Different kinds of cables serve different functions. Used in telecommunications, transportation, the military, space exploration, and mechanical analysis. Optical fiber cables are typically used. [1]. The progress in fiber optics technology is undeniably rapid. The optical fiber is drawn glass (silica) or plastic and has a little wider diameter than a human hair. [1] The most effective means of communication is the transmission of light. It is becoming increasingly common to use fiber optic communication, which allows the fiber to be transmitted across greater distances and at a higher data rate than conventional electrical connections. The lower frequency of the signals makes fibers more practical than metal cables. To carry light into or images out of confined locations, fibers are often bundled in bundles, as in a fiberscope. Fiber optic sensors and fiber lasers are only two examples of the many uses for purpose-built fibers. Since OFs can be easily shaped into cables,

they are widely employed in the communication and computer networking industries. Infrared light has substantially lower attenuation than electric lines through fiber, making it ideal for long-distance communications. It enables communication across great distances with a modest number of repeaters. [3]. OF is a method of transmitting data using light waves via a long fiber consisting of plastic or glass. Metal wires are preferred for transmission in optical fiber because they cause less harm to the signal. Optical fibers are also immune to electromagnetic interference. A unique feature of OF cable is its ability to reflect light entirely from within. It is the goal of fiber optics design to permit light to be distributed throughout the optical fiber (OF) in a way that takes into account the need for both power and transmission distance. If you need to send data over a long distance, use a synchronous multi-bit-rate (SMB) frame, whereas for shorter distances, use a multi-bit-rate (MMF) frame. Protective cladding, such as copper coils, is essential for these fibers to function properly [6].

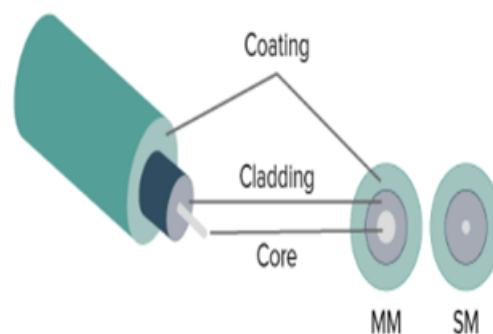


Figure 1: Optical Fibers

Types of Optical Fibers

There is practicality linked with use of different types of optical fibers for communication. Engineers in the field of communication or network workers tasked with the installation of an optical fiber infrastructure must be well-informed and able to act swiftly. Optical fibers come in many varieties, each with its own set of challenges and benefits in terms of price, features, reverse drawing, end system type (for example, transceivers), and the knowledge and expertise required to deal with it. Knowing this allows you to make well-informed decisions that satisfy your needs. Data transmission will, in the future, rely on light. Optical fibers, which are like thin, transparent wires, are also used to transmit light from one location to another. The primary reason for this is that light itself is a kind of wave. The behavior of electromagnetic waves can be understood with the use of a theory called mode theory. In a simplified way, the mode theory groups electromagnetic waves into distinct categories based on their frequency.

OFs forms, materials used and light propagation mode dependent on thermal conductivity.

Classification focuses on the index refractive the following:

- **Step Index Fibers:** It includes core with a covering and has a single global refraction index.
- **Graded Index Fibers:** OF refractive index reduces when the fiber axis increases radial distance.

Classification is based on the following materials:

- **Plastic Optical Fibers:** Polymethacrylate is used to transmit light as central material.
- **Glass Fibers:** It is constructed of incredibly fine glass fibers.

The classification is based on the light emission mode as follows:

Single-Mode Fibers (SMFs):

This type of optical fiber only transmits one light mode, as the name suggests. In other words, it can only accommodate one light wavelength throughout its length.

- Up to 1310 nm or 1550 nm of this wavelength..
- You could think it can't really transmit any more data. The single-mode variety of optical fiber has greater bandwidth and lower loss than the multimode variety, but the latter is the more robust of the two. So, the level of intensity is unrivaled.
- Single-mode fibers are an important step following multimode ones. Multimode cables are a more recent innovation. Small-core wires can only transmit in one direction.
- That the diameter of the core is the same as the wavelength of the light being transmitted.
- Only lasers are employed for the illumination. Only one mode of light can be transmitted by a fiber.
- Some of these fibers are used to transport messages over great distances; their advantage is low attenuation due to light's propagation in a single direction; their disadvantage is that they are difficult to couple.

Multimode Fibers (MMFs):

- As name implies, such optical fibers can be moved along their axis by various modes of light.
- They can do this in a thicker nucleon diameter to explain physically.
- Light wavelengths in multimode fibers range from 850 nm to 1300 nm in the visible spectrum.
- Wave reflection within multimode fiber takes place at various angles for each mode. Therefore, number of reflections will vary based on these angles.
- We can have a mode where the light passes without striking the core at all
- We can have a slightly higher mode, which will travel with appropriate internal reflections.
- Since the basis of optical fiber, communication is a total internal reflection, all modes with incident angles that do not cause total internal reflection get absorbed by the cladding. As a result, losses are created.

All such fibers are used to transmit signals from a short distance.

- Core propagation function & refractive index is used for 4 types of optical fibers as follows:
 - Graded Index-Single mode fibers

- Graded Index-Multimode fibers
- Step Index-Multimode fibers
- Step index-single mode fibers
 - Benefits of Communication
- Thin & non-flammable
- Cost-effective & economical
- Less signal degradation
- Flexible & lightweight
- Less power consumption

Optic Fiber's Applications

Optical fiber's Applications are:

- a) **Communication:** It plays a role in the transmission of phone calls. Optical fusion devices (OFs) release energy in the form of optical pulses. The technology is similar to coaxial cable, but optical fibers can support many more conversations at once. It's not uncommon for us to struggle with finding our voice and expressing ourselves clearly. With fiber optic, we can have crystal-clear conversations.
- b) **Medical Uses:** OFs have many potential uses in the healthcare industry. Blood arteries, lungs, and other hollow body components are used to create the ultrathin, flexible threads. The optical fiber (OF) is used in some medical equipment to aid in non-invasive disease diagnosis.
- c) **Simple Uses:** Other than that, light propagation is by far the most prevalent application of OFs. Therefore, it is entirely possible for bundles of numerous extremely thin fibers to transmit images so long as they are properly collected and optically polished at both ends.
- d) **Military & Space Application:** The military has a significant need for OF. It provides both increased signal bandwidth (BW) and robust signal protection. They can withstand the rigors of the great outdoors thanks to their durability and low weight.
- e) **Television:** Since digital video can be sent more quickly and cheaply over copper wire, it is the preferred method of transmission for over-the-air (OFT) television.
- f) **Computer Network:** With fiber optics, it's possible to send data and finished information from one device to another across the globe without worrying about the data's or information's security.
- g) **Transportation:** Smart highways utilize the telemetry system with fiber optics for things like smart street lights and automated tollbooths to keep things moving along smoothly and efficiently in times

of high traffic and efficiency demands.

- h) **Lighting and Decoration:** Except for Christmas trees, signs, and artistic adornment, these are typically used in the decorative industry. Display examples illustrated how OFs can be used in stores to shine a single light source from a variety of directions.

Advantages of Optical Fiber

- a) **Less Expensive:** Optical cables of many miles may be complete less costly than comparable copper cable lengths
- b) **Increased capacity of carriage:** Since OFs are thin; more fibers are integrated in to a cord of a specified diameter than copper wires, allowing more telephone lines to enter cable via similar cable or more television channels
- c) **Less Signal Degradation:** For OF, signal loss is slightly less than in Copper wire.
- d) **Light Signals:** Various fibers ' line signals do not impact similar cable. It means that telephone calls via OF are easier.
- e) **Digital Signals:** The most suitable fibers for carrying digital signals in computer networks are OFs.
- f) **Non-Flammable:** Since OF cannot flow current, no fire hazard is so much at possibility.
- g) **Lightweight and Thin:** OF is thinner than cable with copper wiring. They are less than copper wire cables in diameter as well as take up less space in the ground.

Disadvantages of Optical Fiber

- a) **Price:** OF is even more costly than copper wire, while sand is considerably less expensive on the market than copper wire.
- b) **Fragility:** Fibers weaker than copper wires are resistant to strong pressure or attack.
- c) **Affected by Chemicals:** Different chemicals, like hydrogen gas (a problem in copper and OFs underwater cables), can easily effect OF glass.
- d) **Opaqueness:** Despite large physical areas of military usage, most fibers are excluded from radiation exposure.
- e) **Requires Special Skills:** OFs are not easily combined as additional training & copper cabling is available.

Scaling Optical Fiber Networks: Challenges & Solutions

Major obstacles to the sustained cost-effectiveness of optical communications are presented by shifts in consumer and machine-to-machine (M2M) network traffic demand. It will be necessary to increase optical parallelism to meet these needs. Every single one of today's phone calls, message, movie download, and Internet app or service uses photons that, at some point, go through a massive NW of OFs. OFs also

connect the vast majority of cell towers, where the light from millions of mobile phones is transformed into infrared photons and sent on a high-powered backhaul into all-fiber networks (NWs), bridging not just geographical distances but also linguistic and cultural ones. Many people rely on them. To make the most of the expensive integrated OF network, WDM systems aim to cram as many optical signals into a single fiber as is physically possible while yet staying within the bandwidth constraints of strategically-placed optical amplifiers across the transmission field. However, the data spectral density (spectral effectiveness) that can be transmitted by fibers of a given length must meet strict constraints, including basic restrictions on amplifying noise and Kerr nonlinearity that lead to various types of signal distortions and practical limitations arising from technical imperfections in transponders and optical amplifiers and from the beginning of a catastrophe.

Wavelength-Division-Multiplexing (WDM)

With wavelength division multiplexing (WDM), traffic can be sent over several optical channels by designating a single wavelength for each signal. Optical switching between wavelengths is possible at every node in a WDM network. It makes it possible to build optical channels that span several fibers directly, keeping the benefits of optical transmission over a single fiber intact. The transmitter and receiver in a wavelength division multiplexing (WDM) system each have a multiplexer and a demultiplexer, respectively, to facilitate transmission and isolation of wavelengths. One possible solution is to employ an optical add-drop multiplexer, which can do both functions simultaneously. In the past, etalon devices were used as optical filtering devices (thin-film optical glass interferometers, stable Fabry – Perot solid-state single-frequency). Since "WDM" is one of three distinct forms of wavelength division multiplexing, it should be noted as such whenever this technology is referenced. WDM systems were initially used in a lab setting in 1980, while the concept had been published in 1978. In the beginning, WDM systems only supported two signals. A modern system can support 160 signals, doubling the bandwidth of a single fiber pair from 100Gb/s to nearly 16Tb/s. Because of the two limits that are applied to routing and wavelength allocations, WDM systems are also widely used by internet service providers. At varying intensities, wavelength conversion is possible. There are variations in the input and output port scenarios, and the situation is more convoluted but mostly the same with numerous terminals. To accomplish a full wavelength conversion, it is necessary to transform any wavelength into another. Each wavelength input can be converted to a different wavelength set other than the wavelength set containing at least one input, thanks to the reduced conversion of wavelength. One exceptional instance is the conversion of a fixed wavelength, in which the input waves can all be converted to the same precise wavelength. If "conversion" solely applies to each individual wavelength, then no conversion is possible.

CONCLUSION

In addition, there is limited information on how ring and star networks compare in terms of performance. The potential for the development of optical ring networks is very promising. The suggestion to combine two enhancements is an intriguing one. To develop a ring sub-network HPN that operates over a wider range of wavelengths than the main HPN. In addition, the hybrid ring-star network offers a wide variety of options for load or route balancing between any two pairs of source and destination nodes. A guideline for WDM upgrading one-chain RPR networks will be developed by further investigation into the effects of

advanced routing algorithms on the efficiency of a hybrid ring star network (resilient packet ring). The name of this type of optical fiber alludes to the fact that it can only carry one mode of light. That is, it can only transmit light of a single wavelength along its length. The typical range for this wavelength is between 1310 and 1550 nm. This makes it seem like it can't transfer as much info as it could otherwise. However, single-mode optical fibers are preferable over multimode ones due to their higher bandwidth and lower loss rates. Thus, no other method can compete with the speed. Single-mode fibers really followed the development of multimode fibers. They're a newer technology than multimode wires. Because of the small size of the cable's core, it can support just a single transmission mode. That is to say, the core's diameter is about comparable in size to the wavelength of light traveling through it. No incandescent bulbs or fluorescent tubes are used, only lasers. It's important to note that single-mode fibers don't use visible light. Light's directional nature means it may be utilized for connections across greater distances with less attenuation than alternative methods. The difficulty in coupling single-mode fibers is a major drawback of this type of cable.

References

1. Dhanya, VV & Das, SK 2012, 'QoS based light path provisioning and performance analysis in WDM network', International Conference on Computing, Electronics and Electrical Technologies, pp. 659-662.
2. Ed, ME 2004, 'Generalized multi-protocol label switching (GMPLS) architecture', IETF, Internet Draft, draft-ietf-ccamp-gmplsarchitecture07.txt.
3. Gagnaire, M, Koubaa, M & Puech, N 2007, 'Network dimensioning under scheduled and random lightpath demands in all-optical WDM networks', IEEE Journal on Selected Areas in Communications, vol. 25, no. 9, pp. 58-67.
4. Gao, S & Jia, X 2003, 'An optimization model for placement of wavelength converters to minimize blocking probability in WDM networks', Journal of Lightwave Technology, vol.21, no.3, pp.684- 694.
5. Garg, G & Singhal, A 2012, 'Investigation of various throughput improvement techniques in DWDM optical networks', International Journal of Advanced Research in Computer Science and Software Engineering, vol. 2, no. 11, pp. 66-70.
6. Gerstel, O, Ramaswami, R, Galen, H & Sasaki 2000, 'Cost-effective traffic grooming in WDM rings', IEEE/ACM Transactions on Networking, vol. 8, no. 5, pp. 618-630.
7. Golmie, N, Thomas, ND & Su, DH 2000, 'A differentiated optical services model for WDM networks', IEEE Communications Magazine, vol. 14, pp. 68-73.
8. Hamad, A, Wu, T, Ahmed, E, Kamal, Arun K, Zhanz, SC 2006, 'On multicasting in wavelength-routing mesh networks', The International Journal of Computer and Telecommunications Networking, vol. 50, no. 16, pp. 3105-3164.
9. Ho, Q & Lee, M 2007, 'A zone-based approach for scalable dynamic traffic grooming in large WDM

mesh networks', *Journal of Lightwave Technology*, vol. 25, no. 1, pp. 261-270.

10. Hu, JQ & Leida, B 2004, 'Traffic grooming, routing and wavelength assignment in optical WDM mesh networks', *IEEE Conference (INFOCOM)*.
11. Huang, C, Jia, X & Zhang, Y 2002, 'A distributed routing and wavelength assignment algorithm for real-time multicast in WDM networks', *Computer Communications*, Vol. 25, no. 17, pp. 1527- 1535.